


Series 82, Order sheet


Illuminated pushbutton, IP 65 & IP 67



Product can differ from the current configuration.

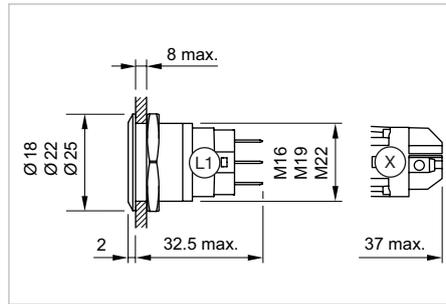

Dimensions [mm]
L1 = Solder/Plug-in terminal 2.8 x 0.5 mm,
X = Screw terminal

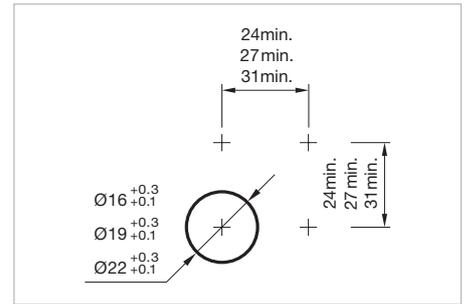

Mounting cut-outs [mm]

Mounting cut-outs

- 4 | Ø 16mm 5 | Ø 19mm 6 | Ø 22mm

Material

- 1 | Stainless steel 2 | Stainless steel chrome coloured 3 | Brass gold coloured 5 | Aluminium natural anodized

Front bezel / Lens

- 5 | flush / flat 6 | raised / flat 7 | flush / convex
-

Connection

- 1 | solderin / plug-in 2 | screw

Switching action

- 1 | momentary 2 | maintained

Illumination

- 1 | ring
lens flush / flat, raised / flat, flush / convex
-
- 2 | dot
lens flush / flat
-

LED colour

- 1 | red 2 | blue 3 | green 4 | yellow 5 | white

LED voltage

- 2 | 6VAC/DC 3 | 12VAC/DC 4 | 24 VAC/DC 5 | 110VAC 6 | 230VAC

Order example for illuminated pushbutton

Mounting cut-outs

4 | Ø 16mm

5 | Ø 19mm

6 | Ø 22mm

Material

1 | Stainless steel


2 | Stainless steel chrome coloured

3 | Brass gold coloured


5 | Aluminium natural anodized

Front bezel/Lens


5 | flush/flat



6 | raised/flat



7 | flush/convex



Connection

1 | solderin/plug-in

2 | screw


Switching action

1 | momentary


2 | maintained

Illumination

1 | ring
lens flush/flat, raised/flat, flush/convex



2 | dot
lens flush/flat



LED colour

1 | red

2 | blue

3 | green

4 | yellow

5 | white

LED voltage

2 | 5VAC/DC

3 | 12VAC/DC

4 | 24VAC/DC

5 | 110VAC

6 | 230VAC



Part No.:

82-6352.1242