


# Series 82, Order sheet


Indicator, IP 65 & IP 67



Product can differ from the current configuration.

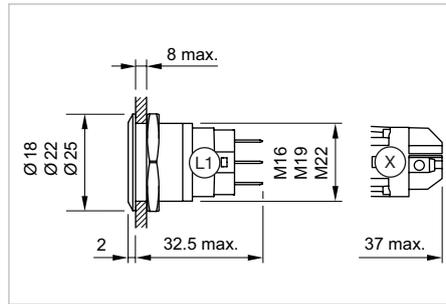

Dimensions [mm]  
L1 = Solder/Plug-in terminal 2.8 x 0.5 mm,  
X = Screw terminal

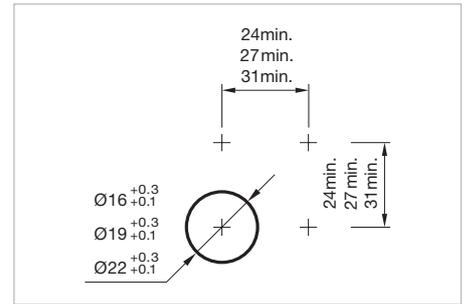

Mounting cut-outs [mm]

## Mounting cut-outs

4 |  $\varnothing 16$ mm

5 |  $\varnothing 19$ mm

6 |  $\varnothing 22$ mm

## Material

1 | Stainless steel


2 | Stainless steel chrome coloured

3 | Brass gold coloured


5 | Aluminium natural anodized

## Front bezel / Lens


5 | flush / flat



6 | raised / flat



7 | flush / convex



## Connection

1 | solderin / plug-in


2 | screw

## Switching action


0 | no

## Illumination

1 | ring  
lens flush / flat, raised / flat, flush / convex



2 | dot  
lens flush / flat



## LED colour

1 | red

2 | blue

3 | green

4 | yellow

5 | white

## LED voltage

2 | 6VAC/DC

3 | 12VAC/DC

4 | 24 VAC/DC

5 | 110VAC

6 | 230VAC

## Order Example for indicator with ring illumination

### Mounting cut-outs

4 | Ø 16mm

5 | Ø 19mm

6 | Ø 22mm

### Material

1 | Stainless steel


2 | Stainless steel chrome coloured

3 | Brass gold coloured


5 | Aluminium natural anodized

### Front bezel/Lens


5 | flush/flat



6 | raised/flat



7 | flush/convex



### Connection

1 | solderin/plug-in


2 | screw

### Switching action


0 | no

### Illumination

1 | ring  
lens flush/flat, raised/flat, flush/convex



2 | dot  
lens flush/flat



### LED colour

1 | red

2 | blue

3 | green

4 | yellow

5 | white

### LED voltage

2 | 6VAC/DC

3 | 12VAC/DC

4 | 24VAC/DC

5 | 110VAC

6 | 230VAC



Part No.:

**82-6161.0124**