

Programmable Operator Interface

# MONITOUCH

Consolidating Essential Functionality  
while Enhancing Operability and Visibility




TECHNOSHOT

# TS1000 Smart Series

# TECHNOSHOT TS1000 Smart Series

- Supports remote operation via VNC server
- Complies with several global standards (CE/KC/UL/cUL)
- Expands FROM capacity 220%\*(26 MB) \*Compared to TS1000 series

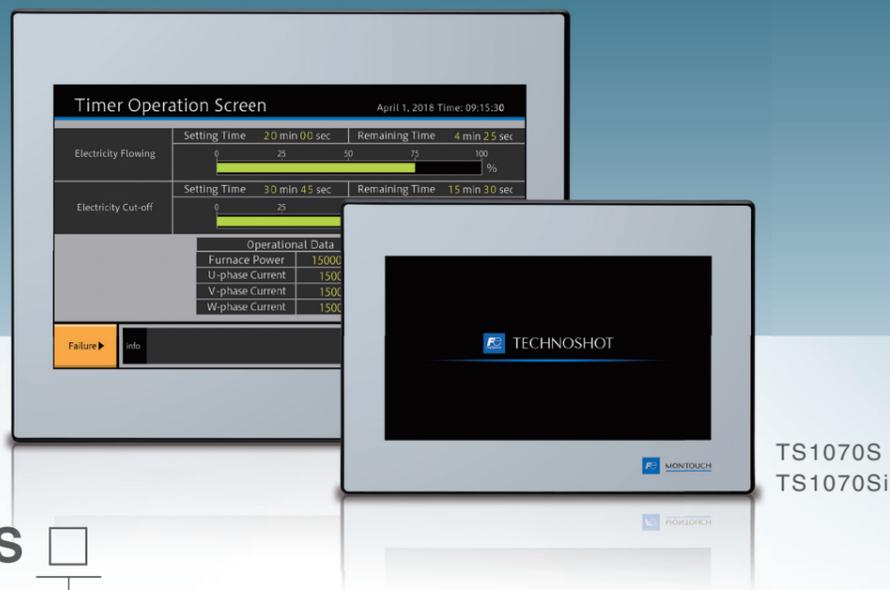

## Model

TS1   0 S

Display size  
07: 7.0" widescreen  
10: 10.2" widescreen

Interface  
i : Built-in Ethernet port  
None : No built-in Ethernet port



## Specifications


Item	TS1070S	TS1070Si	TS1100Si
Main unit	Screen size	7.0" widescreen	
	Display device	TFT color	
	Resolution	800 x 480 dots	
	Colors	65,536 colors	
	Backlight	LED	
	Touch screen	Analog resistive	
	Certifications	CE/KC/UL/cUL	
User memory	FROM	26MB	
	SRAM	128KB	
External interface	COM1 D-Sub9 pin (female)	RS-422/RS-485 (4-wire/2-wire) Data length: 7, 8 bits Parity: Even, odd, none Stop bits: 1, 2 dots Baud rate: 4,800, 9,600, 19,200, 38,400, 57,600, 76,800, 115,200, 187,500*1 bps	
	COM2/COM3 D-Sub9 pin (male)	COM2: RS-232C COM3: RS-422/RS-485 (2-wire) Data length: 7, 8 bits Parity: Even, odd, none Stop bits: 1, 2 bits Baud rate: 4,800, 9,600, 19,200, 38,400, 57,600, 76,800, 115,200 bps	
	Ethernet	-	1 ch
	USB-A	1 ch	
	USB mini-B	1 ch	
Power supply	Permissible range of voltage	DC24V±10%	
	Power consumption (max. rating)	11 W or less	12 W or less
Physical environment	Ambient temperature	0 to 50°C*2	
	Ambient humidity	85% RH or less (without dew condensation)*2	
	Contamination level	2	
	Operation altitude	2,000 m or less	
	Atmosphere	No exposure to corrosive gas or conductive dust	
	Ambient storage temperature	-10 to 60°C*2	
	Ambient storage humidity	85% RH or less (without dew condensation)*2	
Installation conditions	Protective structure	Panel front	IP65 equivalent (when using waterproof gasket*)/IP40 equivalent (when not using a waterproof gasket*)
		Rear case	IP20 equivalent
	Dimensions WxHxD	198.8 x 141.8 x 38.0 mm	266.8 x 206.8 x 38.0 mm
	Panel cutout	189.0 x 134.0 (+0.5/-0) mm	257.0 x 199.0 (+0.5/-0) mm
Case color	Black		

\*1 187,500 bps is only for Siemens MPI/PPI communications. \*2 Use at a wet-bulb temperature of 39°C or less because higher temperatures may cause failure. \*3 This is an optional accessory.

# Lineup of Usability Enhancing Features

## 01 8-Way Communication


Connect up to eight types of PLC or other devices of various models from multiple manufacturers at the same time via both an Ethernet and serial connection.

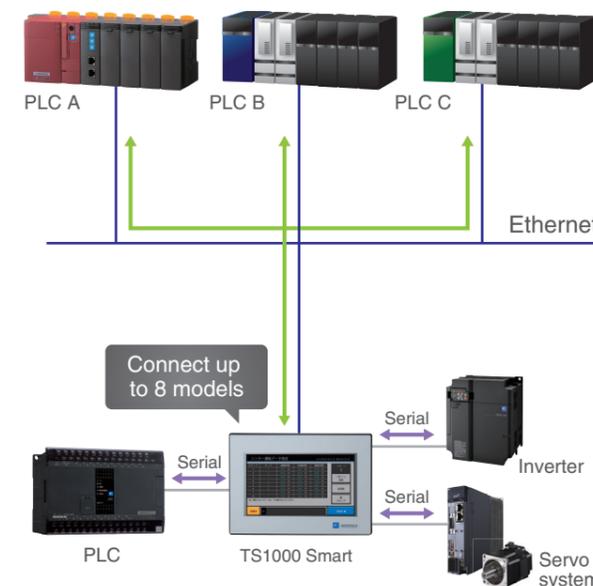


\* With TS1070S, up to 3 models can be connected.

## 02 Expanded Connectivity

- USB port (USB Ver. 2.0 compatible)  
USB port is built-in standard. Use the Type A and Type mini-B to connect to a wide range of devices.

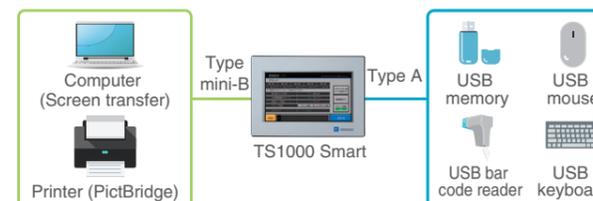

- Ladder transfer  
Monitor, read and write in the ladder program by computer via TS1000 Smart.  
Choose from either Ethernet or USB to connect between the computer and TS1000 Smart.

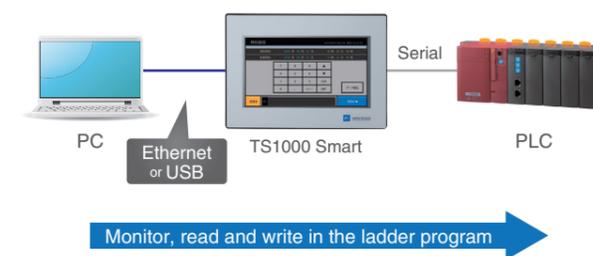

## 03 Trend Sampling

TS1000 Smart series chronologically records a broad-range of data that changes over time to display as trend graphs.


- Enlarged Display Support

Enlarge the display for a particular area of the screen to verify changing waveforms of trend graphs in even more detail.




## 04 Security Features

Restrict functions according to the user to configure a high-level security environment.

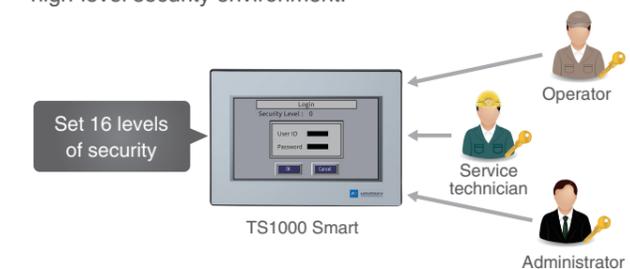

## 05 Operation Log

Record chronological on-screen input, from switch operations to numerical inputs. Combine the operation log with security features and review attribution information to assist in identifying the cause of errors as well as aid in other diagnostics.

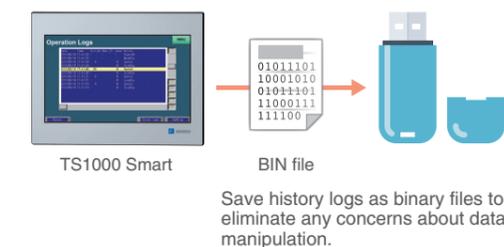

## 06 Multilanguage

Easily toggle between up to 16 on-screen languages from a single screen to eliminate the need to sort and manage files for each language.



Compatible fonts:  
Japanese, English/Western Europe, Chinese (Traditional), Chinese (Simplified), Korean, central European alphabets, Cyrillic alphabets, Greek, Turkish, and Baltic alphabets


## 01 VNC Server

Easily setup the VNC viewer tool on a computer to monitor and operate TS1000 Smart screens on the factory floor via the same computer over Ethernet connection. In addition, monitoring and operations can be easily conducted from a tablet device over wireless router.



## 02 Remote Desktop\*


Connect via Ethernet to display and operate the server directly using TS1000 Smart.

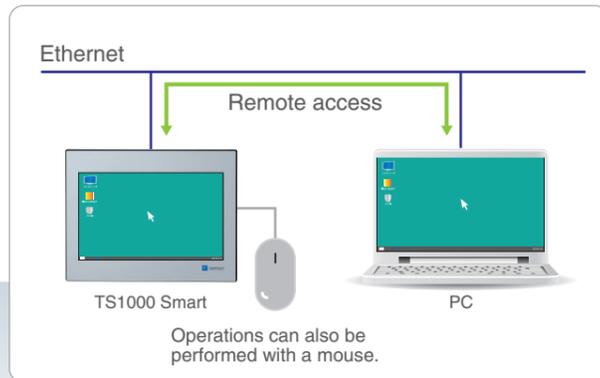

\*A license for V-RemoteDT (usage license) is required.

## 03 Remote Maintenance

Use the TELLUS application software to easily monitor and operate TS1000 Smart screen and PLC information remotely at low cost.

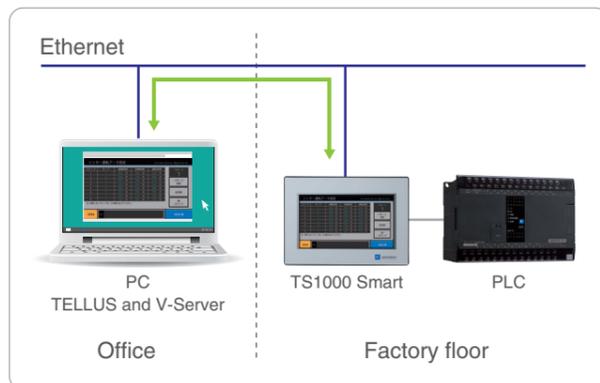

# A Wealth of Network Features to Connect via Ethernet

\*None of the features on this page are included with TS1070S.

TS1070Si




TS1100Si




## 04 FTP Server

Use FTP client tools on a computer to read and write to USB memory mounted on TS1000 Smart.

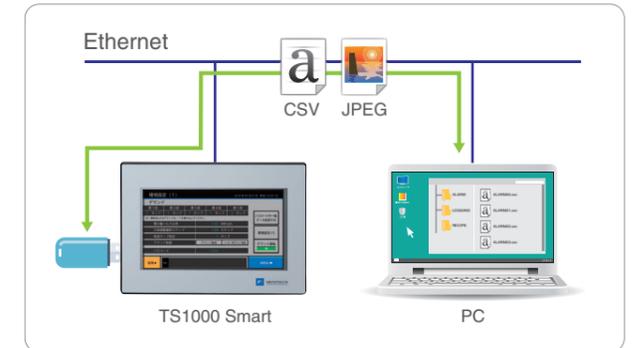


## 05 Network Camera

Display video from a network camera connected via Ethernet with TS1000 Smart. TS1000 Smart can also monitor factory floors.

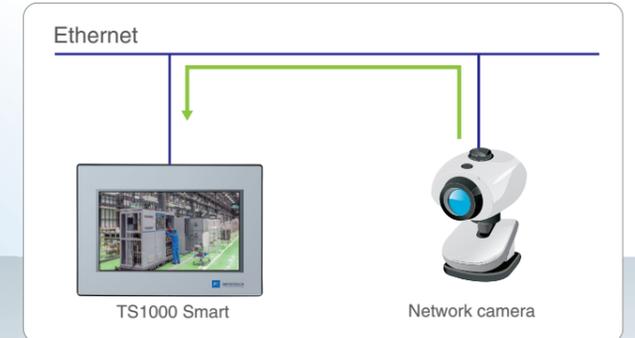

## 06 MES (Manufacturing Execution System)

Collect broad information to store in the server database from production performance to defects and the causes of stoppages with TS1000 Smart through the V-Server.

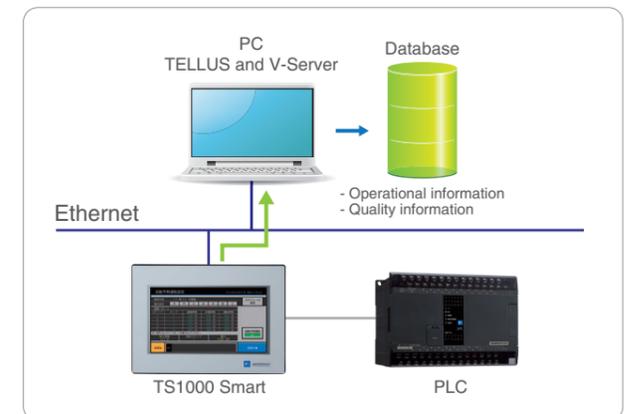

Application software to connect offices and factory floors at minimal cost


## TELLUS and V-Server

The VNC server feature is a remote monitoring and management system able to collect real-time information about factory floors, including data aggregation and data management, via the Internet whether at the office or from overseas.



Catalog No. 9022NE2

# Achieve Sleeker Screens with Easy-to-Understand Operations

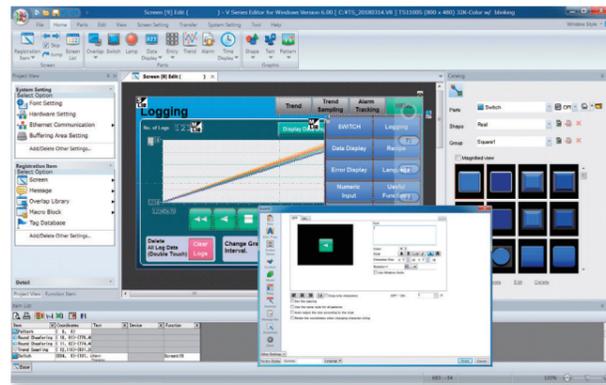

## V-SFT Ver. 6

### 01 Sophisticated Line-up of Icons

V-SFT Ver. 6 offers a combination of real sign and plain icons that allow users to easily create more sophisticated screens than ever before.




Realizing the Creation of Sophisticated Screens

Computer	PC/AT compatible computer running Windows
Operating system*	Windows XP/XP 64Edition/Windows Vista (32bit, 64bit)/Windows 7 (32bit, 64bit)/Windows 8 (32bit, 64bit)/Windows 8.1 (32bit, 64bit)/Windows 10 (32bit, 64bit)
CPU	Pentium 4 2.0 GHz or higher is recommended
Memory	2.0 GB or higher
Hard disc	When installed: 2.0 GB or higher
Disc device	DVD-ROM drive
Display	1,024 x 768 (XGA) resolution or higher
Display colors	High color (16 bits) or higher
Other	Microsoft .NET Framework 4.0 or 4.5 (Microsoft .NET Framework 4.0 is installed automatically on computers that do not have either Microsoft .NET Framework 4.0 or 4.5 installed.)

\*Administrator privileges are required for installation.

#### Plain Icons

A wide range of icon designs have been newly added with a design that closely resembles smartphones and other familiar devices.

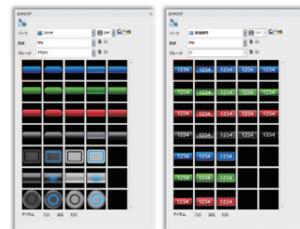

#### Real Icons


V-SFT expands conventional real icons even further.



Icons with a flat design


### 02 Expands Interlock Settings

Set the interlock via the ladder diagram display. The condition settings are easy to understand and convenient even when setting multiple conditions.

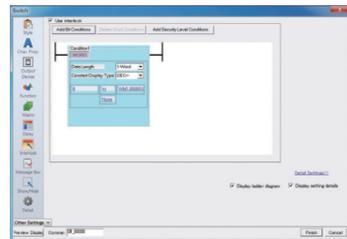


### 03 Supports Configuration with Tool Hints

Comprehensive tool hints throughout the software support the programming of applications. Easily configure settings without a manual by simply moving the mouse close to a setting to automatically display a supplementary description.




### 04 Supports Conversion from TS1000 Series

Screen data from previous models created in older versions of V-SFT can be converted in its present form to data for the current model. This allows users to leverage their screen data assets from previous models.

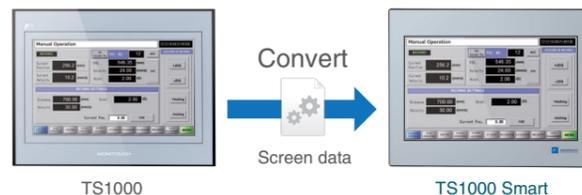

### 05 Intuitively Capture the Connection Device Configuration

The visual representation of the hardware settings make clear which devices are connected to TS1000 Smart.

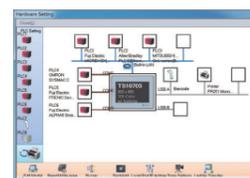

# Motion System Driving the Best Performance Together with TS1000 Smart Series

Programmable Controller **MICREX-SX Series**

## SPF

Achieves excellent cost performance  
Flexibly supports machine based systems

- ◆ High-speed, high-functioning computing performance
- ◆ Variety of options for flexible applications
- ◆ 200kHz, compatible with up to 4-axis servo systems



Catalog No. 22B1-E-0019




MICREX-SX SPF Plus provides advanced motion control, such as synchronous and circular interpolation controls.

Fuji Servo System

## ALPHA5 Smart

Servo System with Enhanced Ease-of-Use



- ◆ High-speed, high precision positioning
  - Frequency response 1500Hz
  - Max motor speed 6000r/min
  - High resolution encoder
    - 18bit ABS/INC 262,144 pulse
    - 20bit INC 1,048,576 pulse
- ◆ Higher cost performance with original main feature
- ◆ New servo operator offers improved usability




Catalog No. 24C1-E-0010



## Dimensions

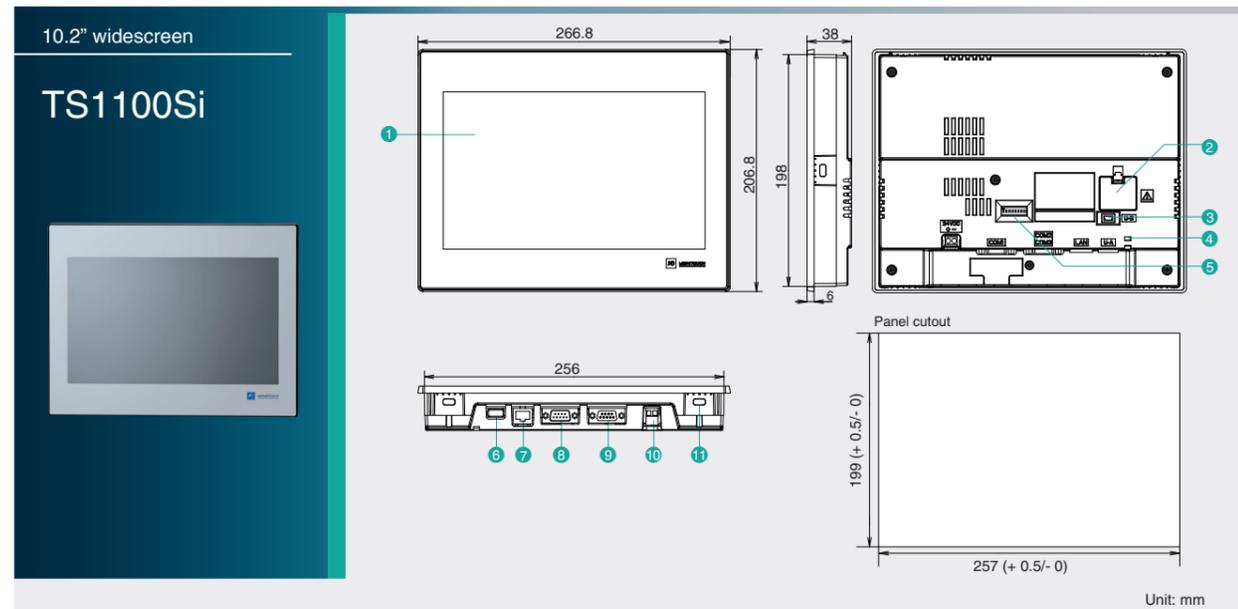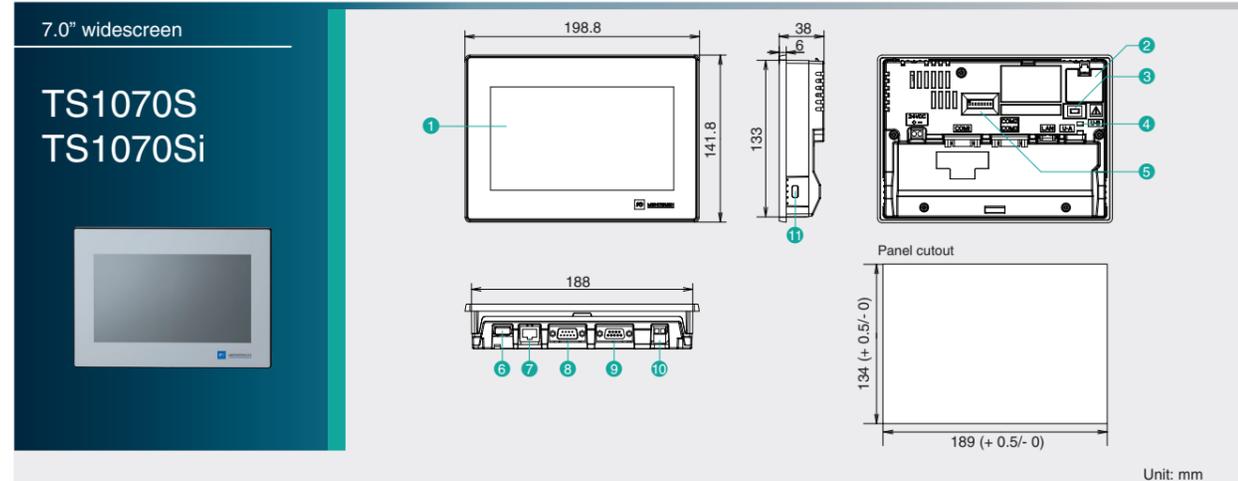


## Interface

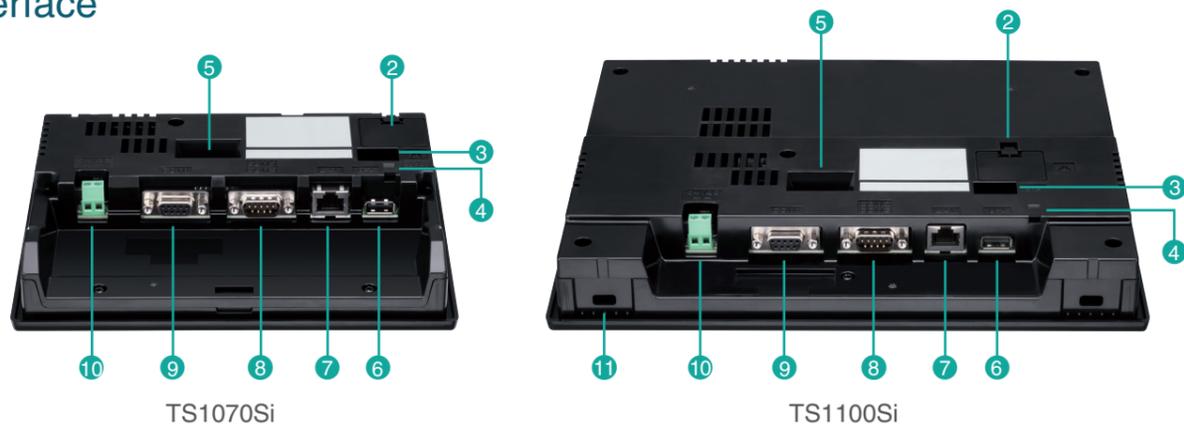

- |                       |                                       |   |
|-----------------------|---------------------------------------|---|
| 1 Display             | 5 DIP switch                          | 8 RS-232C/RS-422/RS-485 connector (COM2/COM3) |
| 2 Battery compartment | 6 USB-A (U-A)                         | 9 RS-422/RS-485 connector (COM1)              |
| 3 USB mini-B (U-B)    | 7 100BASE-TX/10BASE-T connector (LAN) | 10 Power input terminal block                 |
| 4 USB cable retention | *Only TS1070Si/TS1100Si               | 11 Mounting point                             |

## System Configuration

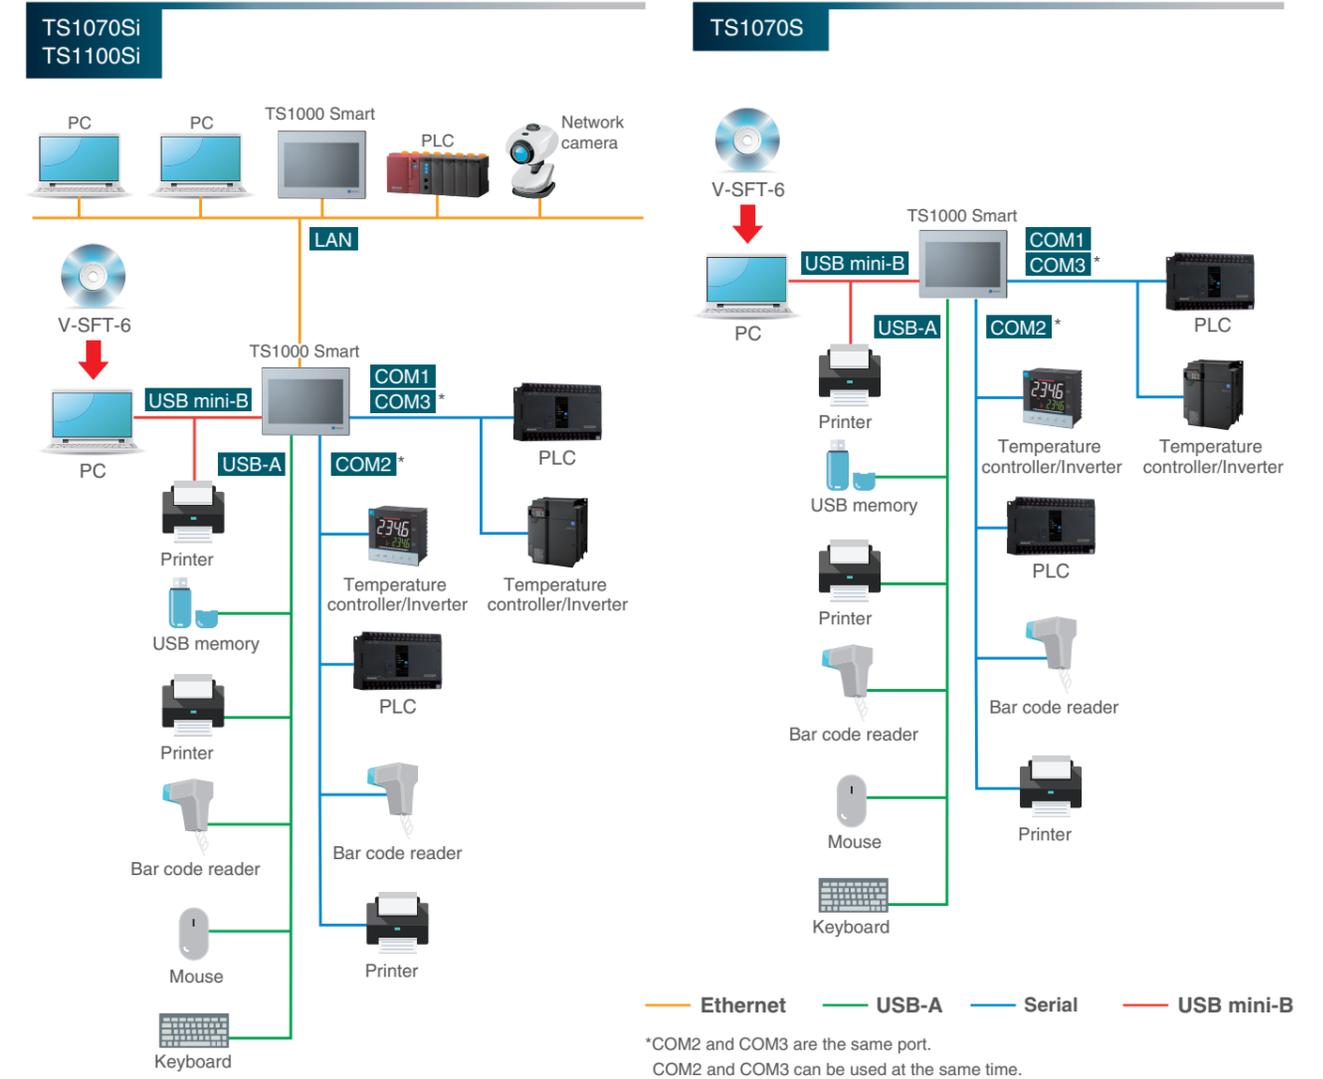

## Optional Accessories

### Terminal Converter TC-D9

Use the terminal converter if the communication device is connected with TS1000 Smart series via the RS-422/485 block. (COM1)



### Waterproof Gasket TS1070S-WP/TS1100S-WP

Use the waterproof gasket if an IP65 protective structure is necessary. This gasket can be used regardless of the Ethernet connection.



### Cable for USB-A Port UA-FR

The cable is used when connecting the USB-A (sleeve) port via the board. (Cable length: 1 m)



# Connection Device List (PLC)

Manufacturer	Models
Fuji Electric	MICREX-F series
	MICREX-F series V4-compatible
	SPB (N mode) & FLEX-PC series
	SPB (N mode) & FLEX-PC CPU
Allen-Bradley	MICREX-SX SPH/SPB/SPM/SPE/SPF series
	MICREX-SX SPH/SPB/SPM/SPE/SPF CPU
	MICREX-SX (Ethernet)
	PLC-5
Automationdirect	PLC-5 (Ethernet)
	SLC500
	SLC500 (Ethernet TCP/IP)
	NET-ENI (SLC500 Ethernet TCP/IP)
	NET-ENI (MicroLogix Ethernet TCP/IP)
	MicroLogix
	MicroLogix (Ethernet TCP/IP)
	ControlLogix / CompactLogix
	ControlLogix (Ethernet)
	Micro800 Controllers
Micro800 Controllers (Ethernet TCP/IP)	
Azbil	Direct LOGIC (K-Sequence)
	Direct LOGIC (Ethernet UDP/IP)
BECKHOFF	Direct LOGIC (MODBUS RTU)
	MX series
CIMON	BMx-x-PLC
	ADS protocol (Ethernet)
DELTA	BP series
	CP series
EATON Cutler-Hammer	S series
	S series (Ethernet)
EMERSON	DVP series
	DVP series (MODBUS ASCII)
FANUC	DVP series (MODBUS TCP/IP)
	ELC
Fatek Automation	EC10/20/20H (MODBUS RTU)
	Power Mate
FESTO	FACON FB series
	FEC
FUFENG	APC series Controller
	90 series
GE Fanuc	90 series (SNP-X)
	90 series (SNP)
Hitachi	90 series (Ethernet TCP/IP)
	RX3i (Ethernet TCP/IP)
Hitachi Industrial Equipment Systems	HIDIC-S10/2a,S10mini
	HIDIC-S10/2a,S10mini (Ethernet)
HYUNDAI	HIDIC-S10/4a
	HIDIC-S10V
IDEC	HIDIC-S10V (Ethernet)
	HIDIC-H
Jetter	HIDIC-H (Ethernet)
	HIDIC-EHV
JTEKT	HIDIC-EHV (Ethernet)
	H15 Robot (MODBUS RTU)
KEYENCE	H14 Robot (MODBUS RTU)
	MICRO 3
KOYO ELECTRONICS	MICRO Smart
	MICRO Smart pentra
LS	JetControl series2/3 (Ethernet UDP/IP)
	TOYOPUC
MITSUBISHI ELECTRIC	TOYOPUC (Ethernet)
	TOYOPUC (Ethernet PC10 mode)
None	TOYOPUC-Plus
	TOYOPUC-Plus (Ethernet)
Panasonic	TOYOPUC-Nano (Ethernet)
	KZ series Link
SAMSUNG	KZ-A500 CPU
	KZ/KV series CPU
SHARP	KZ24/300 CPU
	KV10/24 CPU
SIEMENS	KV-700
	KV-700 (Ethernet TCP/IP)
SINFORIA TECHNOLOGY	KV-1000
	KV-1000 (Ethernet TCP/IP)
TECO	KV-3000/5000
	KV-3000/5000 (Ethernet TCP/IP)
TELEMECANIQUE	KV-7000 (Ethernet TCP/IP)
	SU/SG
TOSHIBA	SR-T (K protocol)
	SU/SG (K-Sequence)
TOSHIBA MACHINE	SU/SG (MODBUS RTU)
	MASTER-KxxxS
TOYO DENKI	MASTER-KxxxS CNET
	MASTER-K series (Ethernet)
TURCK	GLOFA CNET
	GLOFA GM7 CNET
ULTRA INSTRUMENTS	GLOFA GM series CPU
	GLOFA GM series (Ethernet UDP/IP)
VIGOR	XGT/XGK series CNET
	XGT/XGK series CPU
WAGO	XGT/XGK series (Ethernet)
	XGT/XGI series CNET
XINJE	XGT/XGI series CPU
	XGT/XGI series (Ethernet)
YASKAWA ELECTRIC	A series link
	QnA series link
YOKOGAWA ELECTRIC	QnA series (Ethernet)
	QnH (Q) series link
None	QnH (Q) series CPU
	QnU series CPU
None	Q00J/00/01 CPU
	QnH (Q) series (Ethernet)
None	QnH (Q) series link (multi CPU)
	QnH (Q) series (multi CPU) (Ethernet)
None	QnH (Q) series CPU (multi CPU)
	QnH (Q) series (Ethernet ASCII)
None	QnH (Q) series (multi CPU) (Ethernet ASCII)
	QnU series (built-in Ethernet)
None	L series link
	L series (built-in Ethernet)
None	L series CPU
	FX2N/1N series CPU
None	FX1S series CPU
	FX series link (A protocol)

As of April 2018

Manufacturer	Models
MITSUBISHI ELECTRIC	FX-3U/3UC/3G series CPU
	FX-3U/3GE series (Ethernet)
	FX-3U/3UC/3UG series link (A protocol)
	FX-5U/5UC series
	FX-5U/5UC series (Ethernet)
	A-link + Net10
	Q170MCP (multi CPU)
	Q170 series (multi CPU) (Ethernet)
	iQ-R series (Built-in Ethernet)
	iQ-R series link
MODICON	iQ-R series (Ethernet)
	MODBUS RTU
MOELLER	PS4
OMRON	SYSMAC C
	SYSMAC CV
	SYSMAC CS1/CJ1
	SYSMAC CS1/CJ1 DNA
	SYSMAC CS1/CJ1 (Ethernet)
	SYSMAC CS1/CJ1 (Ethernet Auto)
	SYSMAC CS1/CJ1 DNA (Ethernet)
	NJ Series (EtherNet/IP)
	FP series (RS232C/422)
	FP series (TCP/IP)
Panasonic	FP series (UDP/IP)
	FP-X (TCP/IP)
RS Automation	FP7 series (RS232C/422)
	FP7 series (Ethernet)
SAIA	NX7/NX Plus series (70P/700P/CCU+)
	N7/NX series (70/700/750/CCU)
SAMSUNG	NX700 series (Ethernet)
	X8 series
SHARP	X8 series (Ethernet)
	PCD
SIEMENS	PCD S-BUS (Ethernet)
	SPC series
SINFONIA TECHNOLOGY	N plus
	SECNET
TECO	JW series
	JW100/70H COM port
TELEMECANIQUE	JW20 COM port
	JW series (Ethernet)
TOSHIBA	JW300 series
	JW311/312/321/322 series (Ethernet)
TOSHIBA MACHINE	JW331/332/341/342/352/362 series (Ethernet)
	S5 PG port
TOYO DENKI	S7
	S7-200 PPI
TURCK	S7-200 (Ethernet ISOTCP)
	S7-300/400 MPI
ULTRA INSTRUMENTS	S7-300/400 (Ethernet ISOTCP)
	S7-300/400 (Ethernet TCP/IP protocol)
VIGOR	S7-1200/1500 (Ethernet ISOTCP)
	TI500/505
WAGO	TI500/505 V4 Compatible
	SELMART
XINJE	TP-03 (MODBUS RTU)
	TSX Micro
YASKAWA ELECTRIC	T series /V series (T compatible)
	T series /V series (T compatible) (Ethernet UDP/IP)
YOKOGAWA ELECTRIC	EX series
	nv series (Ethernet UDP/IP)
None	TC200
	µ GPCsx series
None	µ GPCsx CPU
	µ GPCsx series (Ethernet)
None	BL series Distributed I/O (MODBUS TCP/IP)
	UIC CPU (MODBUS ASCII)
None	M90/M91/Vision series (ASCII)
	Vision series (ASCII Ethernet TCP/IP)
None	M series
	750 series (MODBUS RTU)
None	750 series (MODBUS Ethernet)
	XC series (MODBUS RTU)
None	Memobus
	CP9200SH/MP900
None	MP2300 (MODBUS TCP/IP)
	CP/MP expansion memobus (UDP/IP)
None	MP2000 series
	MP2000 series (UDP/IP)
None	MP3000 series
	MP3000 series (Ethernet UDP/IP)
None	MP3000 series expansion memobus (Ethernet)
	FA-M3
None	FA-M3R
	FA-M3/FA-M3R (Ethernet UDP/IP)
None	FA-M3/FA-M3R (Ethernet UDP/IP ASCII)
	FA-M3/FA-M3R (Ethernet TCP/IP)
None	FA-M3/FA-M3R (Ethernet TCP/IP ASCII)
	FA-M3V
None	FA-M3V (Ethernet)
	FA-M3V (Ethernet ASCII)
None	Universal serial
	Without PLC Connection
None	MODBUS RTU
	MODBUS RTU EXT Format
None	MODBUS TCP/IP (Ethernet)
	MODBUS TCP/IP (Ethernet) Sub Station
None	MODBUS TCP/IP (Ethernet) EXT Format
	MODBUS ASCII

# Connection Device List (Temperature Controller/Servo/Inverter)

Manufacturer	Models
Fuji Electric	PYX (MODBUS RTU)
	PXR (MODBUS RTU)
	PXF (MODBUS RTU)
	PXG (MODBUS RTU)
	PXH (MODBUS RTU)
	PUM (MODBUS RTU)
	F-MPC04P (loader)
	F-MPC series/FePSU
	FVR-E11S
	FVR-E11S (MODBUS RTU)
	FVR-C11S (MODBUS RTU)
	FRENIC5000 G11S/P11S
	FRENIC5000 G11S/P11S (MODBUS RTU)
	FRENIC5000 VG7S (MODBUS RTU)
	FRENIC-Ace (MODBUS RTU)
	FRENIC-Eco (MODBUS RTU)
	FRENIC-HVAC/AQUA (MODBUS RTU)
	FRENIC-MEGA (MODBUS RTU)
	FRENIC-MEGA SERVO (MODBUS RTU)
	FRENIC-Mini (MODBUS RTU)
FRENIC-Multi (MODBUS RTU)	
FRENIC-VG1 (MODBUS RTU)	
FRENIC series (loader)	
HFR-C9K	
HFR-C11K	
HFR-K1K	
PPMC (MODBUS RTU)	
FALDIC-α series	
FALDIC-W series	
PH series	
PHR (MODBUS RTU)	
WA5000	
APR-N (MODBUS RTU)	
ALPHA5 (MODBUS RTU)	
ALPHA5 Smart (MODBUS RTU)	
WE1MA (Ver. A) (MODBUS RTU)	
WE1MA (Ver. B) (MODBUS RTU)	
WSZ series	
WSZ series (Ethernet)	
4263 series	
Stepping Motor	
SDC10	
SDC15	
SDC20	
SDC21	
SDC25/26	
SDC30/31	
SDC35/36	
SDC45/46	
SDC40A	
SDC40G	
DMC10	
DMC50 (COM)	
AHC2001	
AHC2001+DCP31/32	
DCP31/32	
NX (CPL)	
NX (MODBUS RTU)	
NX (MODBUS TCP/IP)	
AD4402 (MODBUS RTU)	
AD4404 (MODBUS RTU)	
Presence PLUS (Ethernet/IP (TCP/IP))	
Indra Drive	
LT400 series (MODBUS RTU)	
DP1000	
DB1000B (MODBUS RTU)	
KR2000 (MODBUS RTU)	
LT230 (MODBUS RTU)	
LT300 (MODBUS RTU)	
LT830 (MODBUS RTU)	
PMAC	
PMAC (Ethernet TCP/IP)	
Gammaflux	
TTC2100	
High-Pressure Gas Industry	
R-BLT	
SJ300 series	
SJ700 series	
X-SEL controller	
ROBO CYLINDER (RCP2/ERC)	
ROBO CYLINDER (RCS/E-CON)	
PCON/ACON/SCON (MODBUS RTU)	
IBFL-TC	
Servo Drive 9400 (Ethernet TCP/IP)	
FR-*500	
FR-V500	
MR-J2S-*A	
MR-J2S-*CL	
MR-J3-*A	
MR-J3-*T	
MR-J4-*A	
FR-E700	
J124-04x series	
R1M series (MODBUS RTU)	
E5AK	
E5AK-T	
E5AN/E5EN/E5CN/E5GN	
E5AR/E5ER	
E5CK	
E5CK-T	
E5CN-HT	
E5EK	
E5ZD	
E5ZE	
E5ZN	
V600/620/680	
KM20	
KM100	
V680S (Ethernet TCP/IP)	
High-efficiency AR series (MODBUS RTU)	
CRK series (MODBUS RTU)	
LP-400	
KW series	

As of April 2018

Manufacturer	Models
Panasonic	MINAS A4 series
	SR-Mini (MODBUS RTU)
RKC	CB100/CB400/CB500/CB700/CB900 (MODBUS RTU)
	SR-Mini (Standard Protocol)
	REX-F400/F700/F900 (Standard Protocol)
	REX-F9000 (Standard Protocol)
	SRV (MODBUS RTU)
	MA900/MA901 (MODBUS RTU)
RS Automation	SRZ (MODBUS RTU)
	FB100/FB400/FB900 (MODBUS RTU)
SANMEI	CSD5 (MODBUS RTU)
	Moscon-F50 (MODBUS RTU)
SanRex	Cuty Axis
SHARP	DC AUTO (HKD type)
	DS-30D
SHIMADEN	DS-32D
	SHIMADEN standard protocol
SHINKO TECHNOS	C series
	FC series
	GC series
	DCL-33A
	JCx-300 series
	PC-900
	PCD-33A
	ACS-13A
	ACD/ACR series
	WCL-13A
Siemens	S120 (Ethernet ISOTCP)
SUS	XA-A*
TOHO	TTM-000
	TTM-00BT
Tokyo Chokoku Marking Products	TTM-200 (MODBUS RTU)
	MB3315/1010
TOSHIBA	VF-S7
	VF-S9
	VF-S11
	VF-S15
	VF-A7
	VF-AS1
	VF-P7
	VF-PS1
	VF-F51
	VF-MB1
VF-nC1	
VF-nC3	
TOSHIBA MACHINE	VELCONIC series
ULVAC	G-TRAN series
UNIPULSE	F340A
	F371
	F800
	F720A
	F805A
YAMAHA	RCX142
	DX200 (High-Speed Ethernet)
Yokogawa Electric	UT100
	UT750
	UT550
	UT520
	UT350
	UT320
	UT2400/2800
	UT450
	UT32A/35A (MODBUS RTU)
	UT52A/55A (MODBUS RTU)
UT75A (MODBUS RTU)	
None	µR10000/20000 (Ethernet TCP/IP)
	MODBUS RTU
None	MODBUS TCP/IP (Ethernet)

\*The names of the companies and products included in this document are the trademarks or registered trademarks of their respective companies.  
\*TS1070S does not support an Ethernet connection.

## Safety Considerations

- For safe operation, read the instruction manual or user manual that comes with the product carefully or consult the distributor from which you purchased the product, before using the product.
- Products introduced in this catalog have not been designed or manufactured for such applications in a system or equipment that will affect human bodies or lives.
- Customers, who want to use the products introduced in this catalog for special systems or devices such as for atomic-energy control, aerospace use, medical use, passenger vehicle, and traffic control, are requested to consult the Hakko Overseas Sales Section.
- Customers are requested to prepare safety measures when they apply the products introduced in this catalog to such systems or facilities that will affect human lives or cause severe damage to property if the products become faulty.
- For safe operation, wiring should be conducted only by qualified engineers who have sufficient technical knowledge about electrical work or wiring.

## Notes to consider before purchasing

- Appearance and specifications are subject to modification without prior notice due to technical improvements.
- Colors in the catalog may differ from the actual colors due to printing inaccuracies.
- Consult your distributor or us for further information about products in this catalog.

## Fuji Electric Co., Ltd.

URL : [www.fujielectric.com/](http://www.fujielectric.com/)  
Gate City Ohsaki, East Tower,  
11-2, Osaki 1-chome, Shinagawa-ku, Tokyo 141-0032, Japan  
Phone : +81-3-5435-7066  
Fax : +81-3-5435-7420

[www.monitouch.com/](http://www.monitouch.com/)

Autorizovaný distributor pro ČR a SR



**Amtek, spol. s r.o.**  
Videňská 125, 629 00 Brno  
Tel.: 547 125 555 Fax: 547 125 556 mail  
[fuji@amtek.cz](mailto:fuji@amtek.cz)  
<http://www.amtek.cz/fuji>