


series

LD140



LD140 + SM25

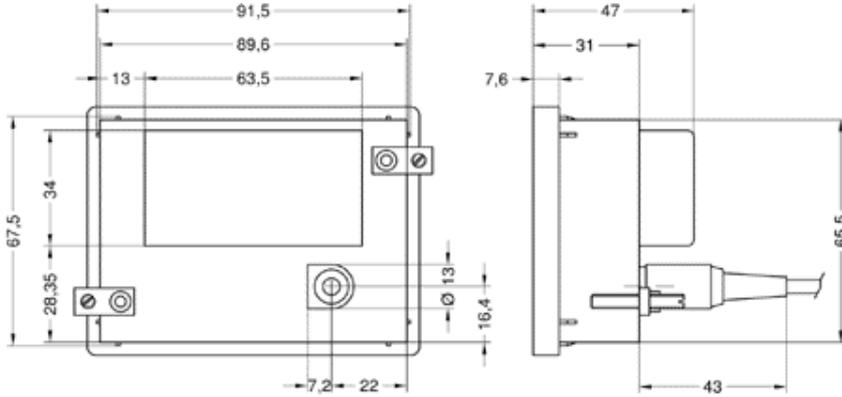

www.lika.biz
• Data sheet
• Manual

PARAMETERS

3 Offset values, preset, resolution, decimal point, mm/inch, counting direction

ENVIRONMENTAL SPECIFICATIONS

Operating temperature range: 0°C ÷ +50°C (+32°F, +122°F)
Storage temperature range: -20°C ÷ +80°C (-4°F, +176°F)
Protection: IP60 front, IP40 back

MECHANICAL SPECIFICATIONS

Dimensions: 96 x 73 x 47 mm
Cut out: 91,5 x 67,5 mm²
Display: LCD, 14 mm (-999999 ÷ 999999)


ELECTRICAL SPECIFICATIONS

Power supply: 1,5 V battery
Consumption: 700 µA
Measurement speed: <5 m/s max.
Input circuit: SM25 magnetic sensor
Interface: RS232 (optional)

ACCESSORIES

SM25: Magnetic sensor
MT25: Magnetic tape

ORDERING CODE

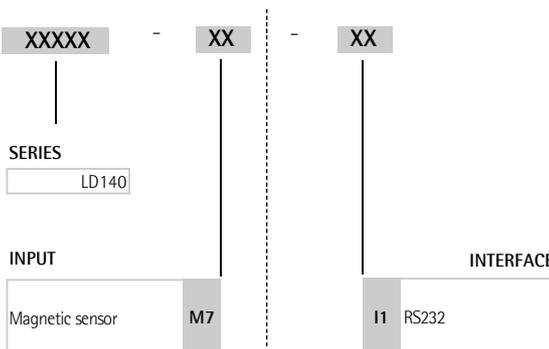

Specifications subject to changes without prior notice